


Product Profile: GlasBac® RE Backing Specification

GlasBac RE incorporates a layer of 100% recycled material* and is itself recyclable through Interface's ReEntry Carpet Reclamation Program. This modular backing system consists of recycled solid thermoplastic vinyl composite material, reinforced with fiberglass and other virgin materials for optimum stability and performance.

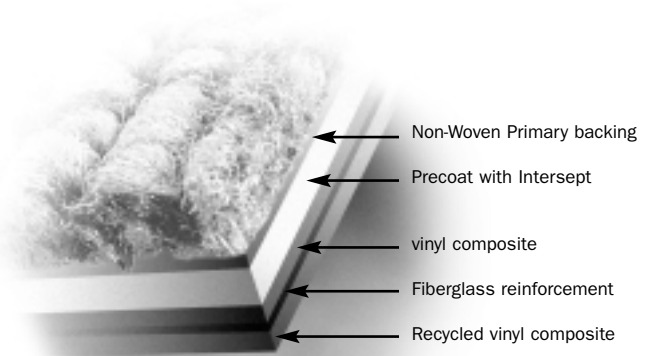

Features and Benefits

1. Contributes to a higher total recycled content for all Interface products.
 - All Interface products with GlasBac RE contain a minimum of 39% total recycled content with a minimum of 19% post-consumer recycled content.
2. Non-Woven Primary Backing
 - The non-woven substrate provides greater dimensional stability and eliminates polypropylene sprouts (threads) at the ends of the tile.
3. Fiberglass-reinforced construction
 - Lays flat with a 10' adhesive grid so it is completely releasable making it ideal for raised floor applications and occupied space replacement.
4. Intersept*
 - A patented antimicrobial preservative, permanently incorporated into the backing precoat, effective at protecting the carpet from a broad spectrum of mold, mildew, bacteria and odor-causing microorganisms.
5. Dimensional Stability
 - Guaranteed to protect against delamination, stretching and shrinkage.
6. Recyclable through ReEntry: The Interface Carpet Reclamation Program
 - After reclamation, the nylon face and vinyl backing are separated. The backing is then recycled into the GlasBac RE backing system, which may then be reclaimed and recycled again.
7. Meets IAQ testing protocols
 - Meets the CRI Green Label and State of Washington Protocol for low VOCs, and the GSA Antimicrobial Certification for antimicrobial effectiveness.

Product Specifications

Reinforcement	Fiberglass reinforced
Backing Thickness	0.090" ± 0.010"
Weight	125.0 oz/yd ² ± 4.0 oz/yd ²
Width	1 m x 1 m tiles 50 cm x 50 cm tiles 50 cm x 1 m tiles 2m Performance Broadloom
Antimicrobial	Intersept

Performance Specifications

Radiant Panel (ASTM E-648)	Class 1
Smoke Density (ASTM E-662)	≤ 450
Dimensional Stability (AACHEN Din 54318)	± 0.10%

Installation

Grid-Set Adhesive 2000, Spray Adhesive 5400 with Spray System or High Performance Broadloom Adhesive 2100 (2m only)

Warranty

Interface Standard 15 Year Product Warranty

For more information about Interface Flooring Systems products contact your local Account Executive or visit us on the web at www.interfaceflooring.com

*contains 100% recycled material