


## Product Profile: GridStrip™ Backing Specification

A releasable peel and stick adhesive system available with Interface GlasBac® tile and Performance Broadloom backing systems. This dry bond adhesive system eliminates the need for wet adhesive, and is completely releasable.

### Features and Benefits

1. Ease of Installation
  - No additional adhesive required, just peel and stick to install.
2. Non-Woven Primary Backing
  - The non-woven substrate provides greater dimensional stability and eliminates polypropylene sprouts (threads) at the ends of the tile.
3. Cost Effective
  - Fast, easy installation and removal with minimum disruption.
4. Releasable
  - It is easy to remove from the floor making it ideal for raised floor applications and occupied space replacement.
5. Intersept®
  - A patented antimicrobial preservative, permanently incorporated into the backing pre-coat, effective at protecting carpet from a broad spectrum of mold, mildew, bacteria and odor-causing microorganisms.
6. Dimensional Stability
  - Guaranteed to protect against delamination, stretching and shrinkage.
7. Recyclable through ReEntry: The Interface Carpet Reclamation Program
  - After reclamation, the nylon face and vinyl backing are separated. The backing is then recycled into the GlasBac RE backing system, which can then be reclaimed and recycled again.
8. Meets IAQ testing protocols
  - Meets the CRI Green Label and State of Washington Protocol for low VOCs, and the GSA Antimicrobial Certifications for antimicrobial effectiveness.

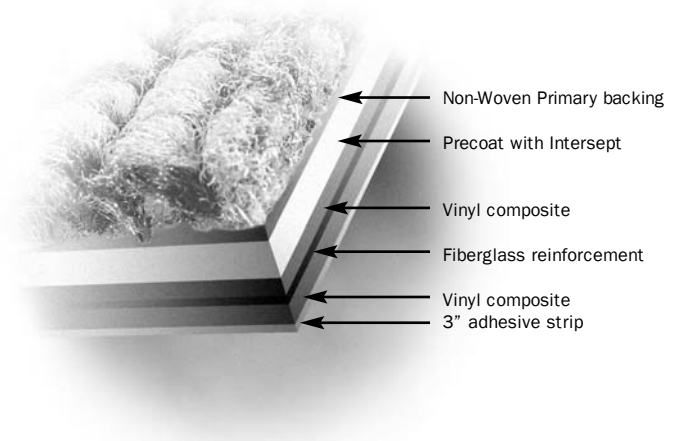

### Product Specifications

Reinforcement	Fiberglass reinforced
Backing Thickness	0.090" ± 0.010"
Weight	118.0 oz/yd <sup>2</sup> ± 4.0 oz/yd <sup>2</sup>
Width	50 cm x 50 cm tiles 50 cm x 1 m tiles 1 m x 1 m tiles 2 m Performance Broadloom
Antimicrobial	Intersept

### Performance Specifications

Radiant Panel (ASTM E-648)	Class 1
Smoke Density (ASTM E-662)	≤ 450
Dimensional Stability (AACHEN Din 54318)	± 0.10%

### Installation

No additional adhesive required.

### Warranty

Interface Standard 15 Year Product Warranty

For more information about Interface Flooring Systems products contact your local Account Executive or visit us on the web at [www.interfaceflooring.com](http://www.interfaceflooring.com)