


Product Profile: NexStep® Backing Specification

Patented cushioned backing system consisting of an attached high-density urethane cushion. This backing contains no PVC.

Features and Benefits

1. Patented Backing System
 - Utilizes the next generation of non-PVC cushioned backing technology for a higher level of comfort under foot and improved sound absorption.
2. Non-Woven Primary Backing
 - The non-woven substrate provides greater dimensional stability and eliminates polypropylene sprouts (threads) at the ends of the tile.
3. Reclaimable through ReEntry: The Interface Carpet Reclamation Program
 - Designed with a “zipper” so that upon reclamation Interface can separate the nylon from the backing for easier recycling in future recycling facilities.
4. Intersept®
 - A patented antimicrobial preservative, permanently incorporated into the backing pre-coat, effective at protecting carpet from a broad spectrum of mold, mildew, bacteria and odor-causing microorganisms.
5. Dimensional Stability
 - Guaranteed to protect against delamination, stretching and shrinkage.
7. Meets IAQ testing protocols
 - Meets the CRI Green Label and State of Washington Protocol for low VOCs, and the GSA Antimicrobial Certifications for antimicrobial effectiveness.

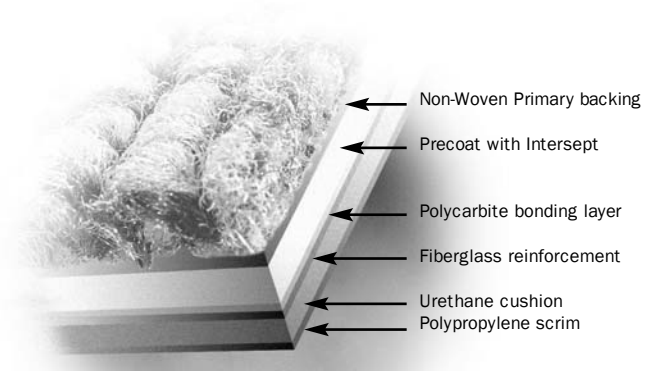

Product Specifications

Reinforcement	Fiberglass reinforced with polypropylene base fabric.
Cushion Density	18 lb/ft ³
Backing Thickness	0.156" ± 0.010"
Weight	96.0 oz/yd ² ± 2.0 oz/yd ²
Width	50 cm x 50 cm tiles 50 cm x 1 m tiles 1 m x 1 m tiles 2 m Performance Broadloom
Antimicrobial	Intersept

Performance Specifications

Radiant Panel (ASTM E-648)	Class I
Smoke Density (ASTM E-662)	≤ 450
Dimensional Stability (AACHEN Din 54318)	± 0.30%

Installation

Adhesive 2300, Spray Adhesive 5600 with Spray System or Adhesive 1400 (2m only).

Warranty

Interface Standard 15 Year Product Warranty

For more information about Interface Flooring Systems products contact your local Account Executive or visit us on the web at www.interfaceflooring.com