


Product Profile: GlasBac® Backing Specification

GlasBac is a patented modular and Performance Broadloom backing system consisting of two layers of thermoplastic vinyl composite material, reinforced with fiberglass for optimum stability and performance.

Features and Benefits

1. Patented system used for 30 years
 - Proven performance in the commercial flooring market.
2. Non-Woven Primary Backing
 - The non-woven substrate provides greater dimensional stability and eliminates polypropylene sprouts (threads) at the ends of the tile.
3. Fiberglass reinforced construction
 - Lays flat with a 10' adhesive grid so it is completely releasable making it ideal for raised floor applications and occupied space replacement.
4. Intersept®
 - A patented antimicrobial preservative, permanently incorporated into the backing precoat, effective at protecting carpet from a broad spectrum of mold, mildew, bacteria and odor-causing microorganisms.
5. Dimensional Stability
 - Guaranteed to protect against delamination, stretching and shrinkage.
6. Recyclable through ReEntry: The Interface Carpet Reclamation Program
 - After reclamation, the nylon face and vinyl backing are separated. The backing is then recycled into the GlasBac RE backing system, which can then be reclaimed and recycled again.
7. Meets IAQ testing protocols
 - Meets the CRI Green Label and State of Washington Protocol for low VOCs, and the GSA Antimicrobial Certifications for antimicrobial effectiveness.

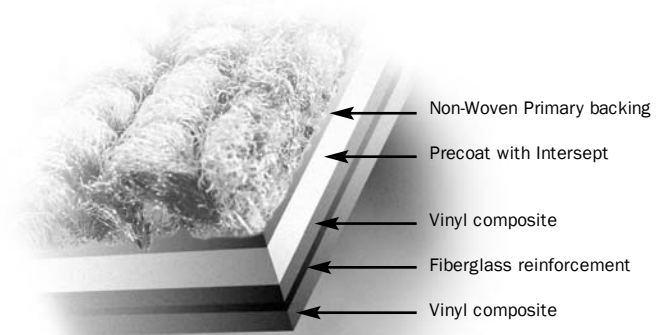

Product Specifications

Reinforcement	Fiberglass reinforced
Backing Thickness	0.090" ± 0.010"
Weight	tile-117.0 oz/yd ² ± 4.0 oz/yd ² RB.-117.0 oz/yd ² ± 4.0 oz/yd ²
Width	50 cm x 50 cm tiles 50 cm x 1m tiles 1 m x 1 m tiles 2 m Performance Broadloom
Antimicrobial	Intersept

Performance Specifications

Radiant Panel (ASTM E-648)	Class 1
Smoke Density (ASTM E-662)	≤ 450
Dimensional Stability (AACHEN Din 54318)	± 0.10%

Installation

Grid-Set Adhesive 2000, Spray Adhesive 5400 with Spray System or High Performance Broadloom Adhesive 2100 (2m only).

Warranty

Interface Standard 15 Year Product Warranty

For more information about Interface Flooring Systems products contact your local Account Executive or visit us on the web at www.interfaceflooring.com